

# Pipe Hangers

**Fig. 200 - "Trimline" Adjustable Band Hanger (B-Line B3170NF)**

**Fig. 200F - "Trimline" Adjustable Band Hanger with Felt Lining for Copper Tubing (B-Line B3170NFF)**

**Fig. 200C - "Trimline" Adjustable Band Hanger with Plastic Coated (B-Line B3170NFC)**

## Size Range:

Fig. 200 - 1/2" (15mm) thru 8" (200mm) pipe

**Material:** Steel, Pre-Galvanized to G90 specifications

**Function:** For fire sprinkler and other general piping purposes. Knurled swivel nut design permits hanger adjustment after installation.

## Features:

- (1/2" (15mm) thru 2" (50mm)) Flared edges ease installation for all pipe types and protect CPVC plastic pipe from abrasion. Captured design keeps adjusting nut from separating with hanger. Hanger is easily installed around pipe.
- (2 1/2" (65mm) thru 8" (200mm)) Spring tension on nut holds it securely in hanger before installation. Adjusting nut is easily removed.

**Approvals:** Underwriters Laboratories listed (1/2" (15mm) thru 8" (200mm)) in the USA (**UL**) and Canada (**cUL**) for steel and CPVC plastic pipe and Factory Mutual Engineering Approved (3/4" (20mm) thru 8" (200mm)). Conforms to Federal Specifications WW-H-171E & A-A-1192A, Type 10 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 10.

**Maximum Temperature:** 650°F (343°C)

**Finish:** Pre-Galvanized. Stainless Steel materials will be supplied with (2) hex nuts in place of a knurl nut.

**Order By:** Part number and pipe size

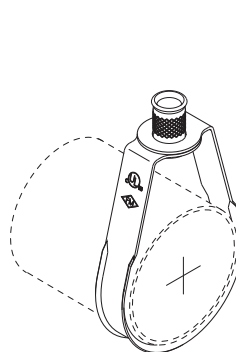


Fig. 200-1/2 to 200-2

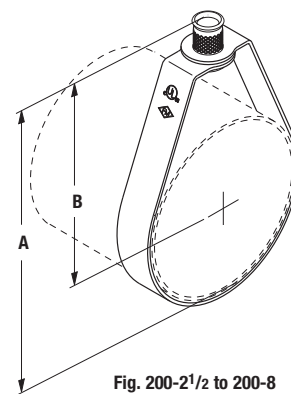


Fig. 200-2 1/2 to 200-8



Fig. 200C



Fig. 200F



Fig. 200

**\*\* Note:** For metric hanger rod sizes add the metric rod size to the figure number.  
Example: 200M8-1 1/2 or 200M10-1 1/2

Part No.	Pipe Size		Rod Size		A		B		Max. Rec. Load		Approx. Wt./100	
	in.	(mm)	in.	mm**	in.	(mm)	in.	(mm)	lbs.	(kN)	lbs.	(kg)
200-1/2	1/2"	(15)	3/8"-16	M8 or M10	3 1/8"	(79.4)	2 5/8"	(66.7)	400	(1.78)	11	(5.0)
200-3/4	3/4"	(20)	3/8"-16	M8 or M10	3 1/8"	(79.4)	2 1/2"	(63.5)	400	(1.78)	11	(5.0)
200-1	1"	(25)	3/8"-16	M8 or M10	3 3/8"	(85.7)	2 5/8"	(66.7)	400	(1.78)	12	(5.5)
200-1 1/4	1 1/4"	(32)	3/8"-16	M8 or M10	3 3/4"	(94.0)	2 7/8"	(73.0)	400	(1.78)	13	(5.9)
200-1 1/2	1 1/2"	(40)	3/8"-16	M8 or M10	3 7/8"	(98.4)	2 7/8"	(73.0)	400	(1.78)	14	(6.4)
200-2	2"	(50)	3/8"-16	M8 or M10	4 1/2"	(114.3)	3"	(76.3)	400	(1.78)	15	(6.9)
200-2 1/2	2 1/2"	(65)	3/8"-16	M10	5 5/8"	(142.9)	4 1/8"	(104.7)	600	(2.67)	27	(12.3)
200-3	3"	(75)	3/8"-16	M10	5 7/8"	(149.1)	4"	(101.6)	600	(2.67)	29	(13.3)
200-3 1/2	3 1/2"	(90)	3/8"-16	M10	7 3/8"	(187.3)	5 1/4"	(133.3)	600	(2.67)	34	(15.6)
200-4	4"	(100)	3/8"-16	M10	7 3/8"	(187.3)	5"	(127.0)	1000	(4.45)	35	(16.0)
200-5	5"	(125)	1/2"-13	M12	9 1/8"	(231.8)	6 1/4"	(158.7)	1250	(5.56)	66	(30.2)
200-6	6"	(150)	1/2"-13	M12	10 1/8"	(257.2)	6 3/4"	(171.4)	1250	(5.56)	73	(33.4)
200-8	8"	(200)	1/2"-13	M12	13 1/8"	(333.4)	8 3/4"	(222.2)	1250	(5.56)	136	(62.3)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.